

TS-800/1000WNV | HIGH SPEED FOLDING AND GLUING MACHINE


SPECIFICATIONS

Stock Type	Cardboard, E-flute corrugated and decorated board.
Folding Capability	Standard Folding boxes, Double sides boxes, Crash-lock Bottom boxes, 4/6 corners
Machine Speed	Max. 300 M /min
Max. Blank width	800mm / 1000mm
Pre-Folding	No. 1 Creasing line 180° \ No. 3 Creasing line 135°
Feeding	Automatic and continuous feeding.
Glue Type	(For glue pot) Water based glue
Power Required	15KW
Machine Weight(approx.)	800: 6,500kgs, 1000: 8,500kgs



Straight line

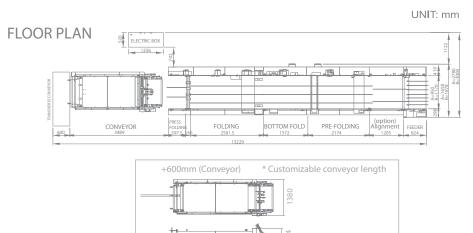


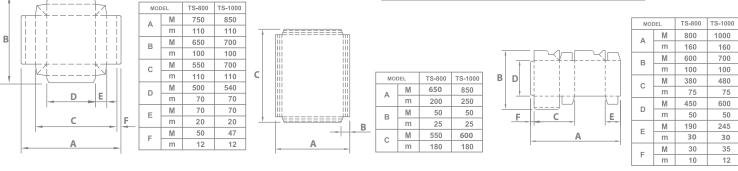

Both sides

Both sides

Lock bottom

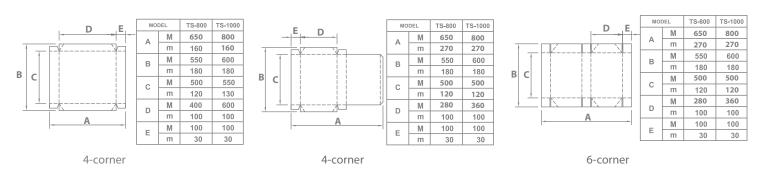



TSAIR SHUENN MACHINERY IND CO., LTD. SBL MACHINERY CO., LTD.

108, Sec. 1, Ganyuan St., Shulin Dist., New Taipei City 23880, Taiwan Tel: +886-2-2680-2199 Fax: +886-2-2680-2197 http://www.sbl.tw E-mail: info@sbl.tw



STS MACHINERY CO., LTD.

Xi-Cheng Industrial Area2, Heng Li Town, Dongguan City, China. 523465 Tel: +86-769-82180588 Fax: +86-769-81180989 http://www.stsmachinery.com




EN-F-800/1000-002-051019 Specifications are subject to change without notice

Brochure content for reference only, actual specifications are based on QUOTATION. * The blank size shall be viable only by means of the relevant options attached







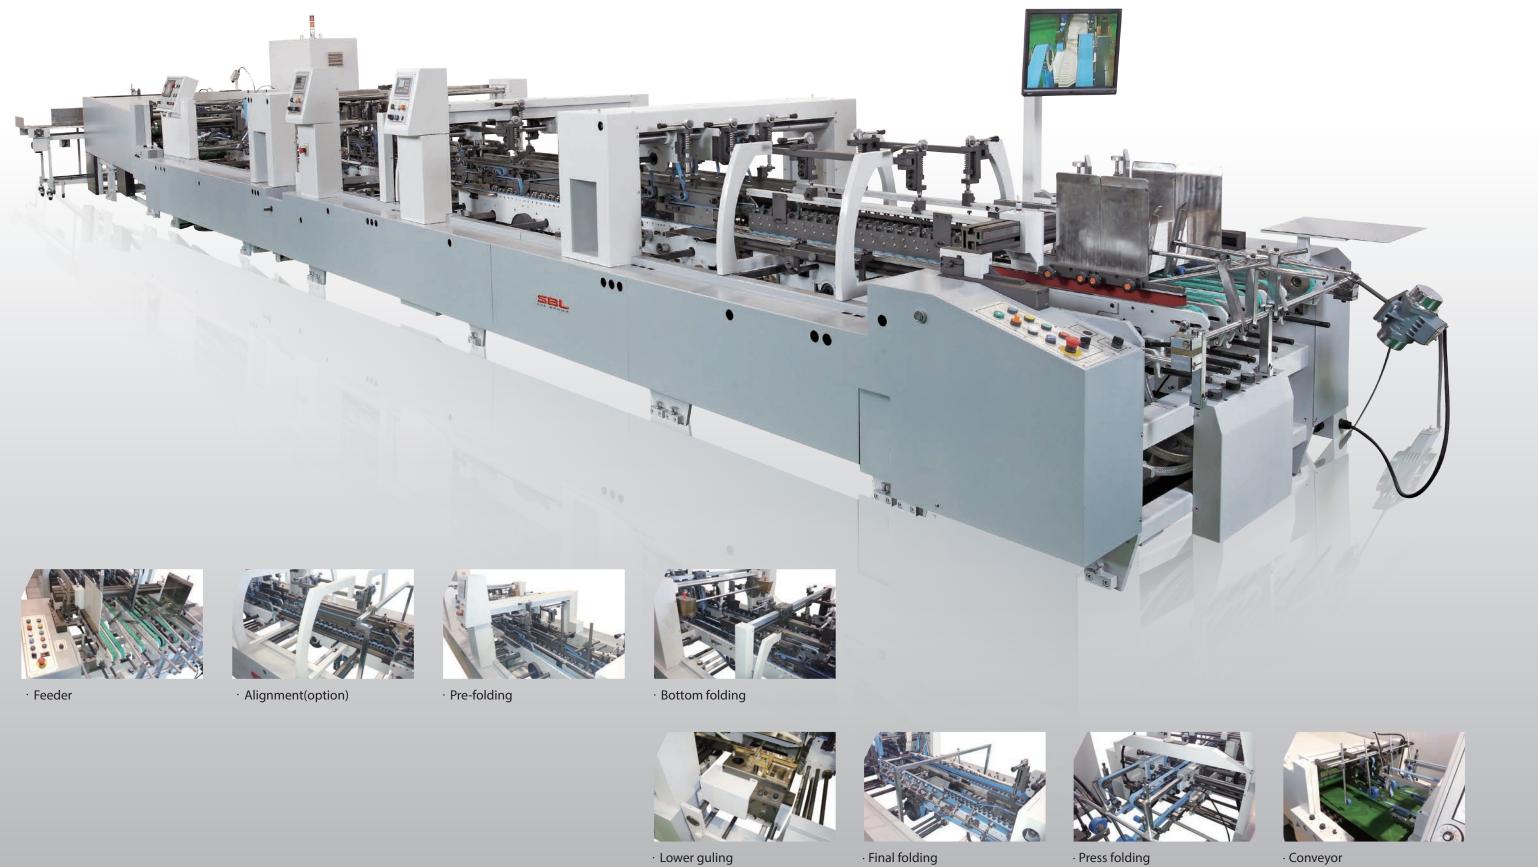











FEATURES

1. Equipped with wireless remote control for easy operation and high mobility.

- 2. Large full color stacking monitor / CCD system and touch screen setting monitor.
- 3. Individually adjustable feeding belts without suction. (Suction device is optional)
- 4. Pneumatic lifter on feeder and pattern feeding mechanism can easily adjust for different sheets width.
- 5. Position indicator on all carriers to ensure easy and quick change carrier position.
- 6. Top belt drive system in pre-fold section and final fold section. Can run either carton board or E flute corrugated board job more precisely.
- 7. Pattern aluminum pressing board with fixing clips make job changing quicker and easier.
- 8. Pre-fold left/right upper carrier and final fold left/middle/right upper carrier can adjust independently.
- 9. PLC program control system with two servo motor backing fold system, suitable for 4 &6 point boxes, cake, gift, lock bottom boxes, double wall boxes and standard straight line boxes production, Modulize options can be adapted to run each different appliance easily.
- 10. Heavy duty inverter for main motor and timing belt for driving motor.
- 11. Max. machine speed of 300m/min, high efficiency, low noise, durable and easy to maintain.
- 12. Standard lower and topper glue pot unit on both sides, easy to remove, fix and clean.
- 13. Adjustable pressing roller after final fold section to reach different flatness requirements.
- 14. Standard machine include independent electrical cabinet, touch screen monitor setting system, volume setting and kicker device.
- 15. Unique conveyor design help smoother paper stacking and high efficiency.

